


PRODUCT DATA SHEET

DURO-LAST BALLAST MAT

Description:

The ballast mat is a 9 oz. per sq. yard material that provides a lightweight and cost-effective protective layer between ballast stones and paver-style ballast. The ballast mat is made from a non-woven, 100% polyester material that is designed to resist damage.

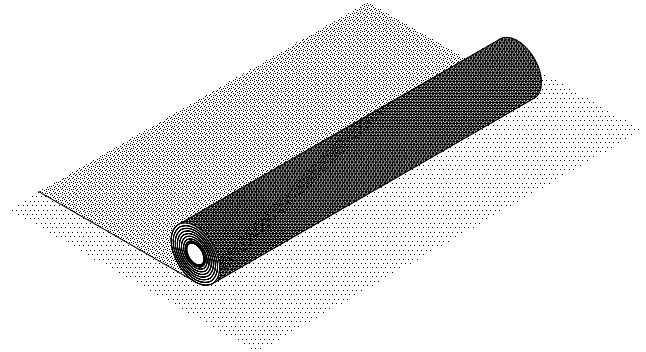

The ballast mat may be used under:

- Concrete pavers
- Pea gravel
- Washed river stone

Installation:

The ballast mat must be installed on a clean and smooth surface, smooth side up. The ballast mat is available in 12 ft. x 100 ft. rolls. Individual pieces must be overlapped at a minimum 2-inch.

After completing all membrane and flashing seams, position the ballast protection mat loosely over the membrane. **NOTE: Do not cover any field seams prior to inspection by a Duro-Last Technical Representative.**

Physical Properties	
Dimensions	12' x 100'
Area	1200 square feet
Weight	9 oz. per sq. yard
Thickness	.132

Be sure that the ballast mat extends to, but not over, drain bases or scupper openings so as not to restrict water flow.

For more information on these and other Duro-Last Products, contact the Duro-Last Engineering Services Department.

E-Mail: engineering@duro-last.com

"Duro-Last" and the interlocking "DL" are registered marks owned by Duro-Last Roofing, Inc. October 2005



Duro-Last Roofing, Inc.
525 Morley Drive
Saginaw, MI 48601
Ph: 1-800-248-0280
Fax: 1-800-432-9331
www.duro-last.com