

# PRODUCT DATA SHEET

## DURO-LAST CONCRETE NAIL


### Description:

Duro-Last<sup>®</sup>, Inc. specifies the use of concrete nails for the mechanical fastening of the Duro-Last<sup>®</sup> Single-Ply Roofing System on structural concrete decks. Concrete nail type fasteners are Duro-Coated for protection against the harsh roofing environment. The concrete nail(s) surpass the FM 4470 specification and shall be used to fasten both insulation and the Duro-Last<sup>®</sup> membrane to the deck.

Duro-Last<sup>®</sup> stocks concrete nail in the sizes noted in the chart to the right. Additional sizes are available on a drop ship basis. Please allow adequate time for ordering and delivery on special orders.

### Installation:

Concrete nails are designed to be driven into a hole made by a 3/16-inch (5 mm) masonry drill bit, 1½-inches deep minimum. A 1-inch penetration is required into the concrete. A Duro-Last<sup>®</sup> Stress Distribution Plate is required for each fastener.

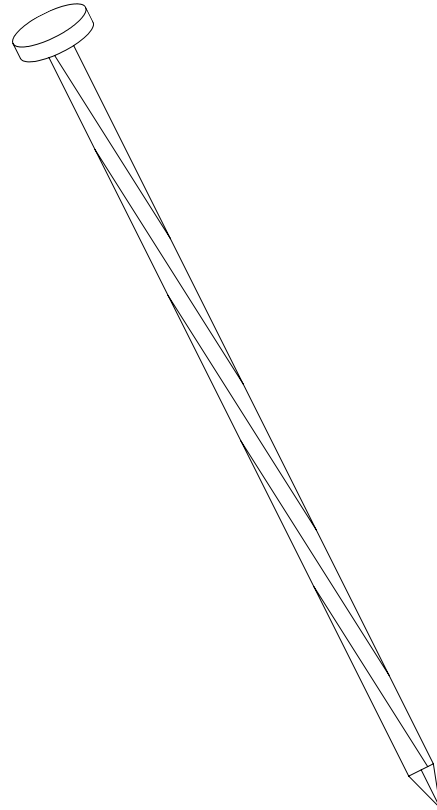

Length		Amount/box
US	Metric	
1.5"	38mm	500
2.0"	51mm	500
2.5"	64 mm	500
3.0"	76mm	500
3.5"	89mm	500
4.0"	102mm	500
4.5"	114mm	500
5.0"	127mm	500
5.5"	140mm	500
6.0"	152mm	500

For more information on these and other Duro-Last Products, contact the Duro-Last Engineering Services Department.

E-Mail: [engineering@duro-last.com](mailto:engineering@duro-last.com)

"Duro-Last" and the interlocking "DL" are registered marks owned by Duro-Last Roofing, Inc. October 2005



Duro-Last Roofing, Inc.  
525 Morley Drive  
Saginaw, MI 48601  
Ph: 1-800-248-0280  
Fax: 1-800-432-9331  
[www.duro-last.com](http://www.duro-last.com)