

PRODUCT DATA SHEET

DURO-LAST CONCRETE SCREW


Description:

Duro-Last® specifies the use of concrete screws for the mechanical fastening of the Duro-Last® Single-Ply Roofing System on structural concrete decks. Duro-Last® Concrete screw type fasteners are equipped with #3 square drive truss heads and Duro-Coated for protection against the harsh roofing environment. Duro-Last® Concrete screws surpass the FM 4470 specification and shall be used to fasten both insulation and the Duro-Last® membrane to the deck.

Duro-Last® stocks concrete screws in the sizes noted in the chart to the right. Additional sizes are available on a drop ship basis. Please allow adequate time for ordering and delivery on special orders.

Installation:

Duro-Last® Concrete screws are designed to be installed into a hole made by a 3/16-inch (5mm) masonry drill bit, 1½-inches (37mm) deep. A 1-inch (25mm) fastener penetration is required into the concrete. A Duro-Last® Plate is required for each fastener with membrane attachment.

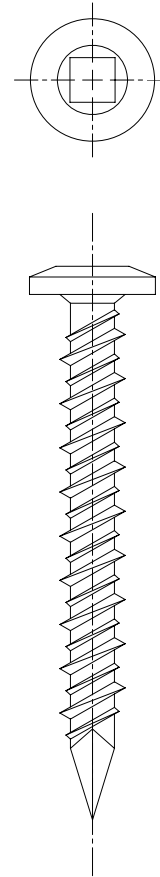

Size		Amount/box
1.25"	31 mm	1000
1.75"	44 mm	1000
2.25"	57 mm	1000
2.75"	69 mm	1000
3.25"	82 mm	1000
3.75"	95 mm	1000
4.25"	107 mm	1000
5.00"	127 mm	1000
5.50"	139 mm	1000
6.00"	152 mm	500
6.50"	165 mm	500
7.00"	178 mm	500
7.50"	190 mm	500
8.00"	203 mm	500

For more information on these and other Duro-Last Products, contact the Duro-Last Engineering Services Department.

E-Mail: engineering@duro-last.com

"Duro-Last" and the interlocking "DL" are registered marks owned by Duro-Last Roofing, Inc. October 2005



Duro-Last Roofing, Inc.
525 Morley Drive
Saginaw, MI 48601
Ph: 1-800-248-0280
Fax: 1-800-432-9331
www.duro-last.com