

PRODUCT DATA SHEET

DURO-LAST CURB FLASHINGS

Description:

Duro-Last® Prefabricated Curb Flashing(s) (available in white, gray and tan colors) are fabricated from a high tenacity, low shrink, weft inserted 18 x 14, 1000 Denier polyester fabric that has been coated with a proven thermoplastic alloy. For more information on the types of membranes available, see the membrane product data sheets.

Curb flashing is easily heat (hot air) welded to the Duro-Last® deck membrane. Hot air seaming eliminates the need for chemicals, torches and other unsafe, non-manageable seaming systems. All Duro-Last® Curb Flashings are prefabricated using Duro-Last® Patented outside corners to eliminate field welds in the critical corner area(s). The charts below show the minimum curb sizes available for each of the available curb styles.

Installation:

Custom prefabricated curb flashings are required to flash all square or rectangular roof penetrations. Curb flashings shall be individually ordered and manufactured to fit each roof top curb. The deck membrane shall be installed and mechanically attached around the perimeter of the penetration at the same fastening pattern as the deck membrane tabs with a maximum of 18-inches on center and no less than one fastener per side. It is not necessary to place fasteners at the corners. The flashing must extend a minimum of 8-inches (.2 m) in vertical height, excluding the curb with top flashing. The flashings may be terminated with termination bar or extended onto the inside of the curb. (See details 4010 & 4020). The curb with top flashing does not require termination.

Notes to Remember:


- When ordering Open Curbs you do not need to add the Duro-Last® membrane required to weld the curb closed.
- A flashing for a canted curb should be ordered using the dimensions above the cant. A flashing with a 12-inch skirt will provide the necessary membrane to cover the cant.
- A curb with a top can be *no greater* than 5-feet in both width and length and can only be ordered closed.

This sheet provides the information for ordering standard curbs. However, you can order any variety such as a Canted Curb with a Top. Add 1/4" to all dimensions for a better fitting flashing.


For more information on these and other Duro-Last Products, contact the Duro-Last Engineering Services Department.

E-Mail: engineering@duro-last.com


"Duro-Last" and the interlocking "DL" are registered marks owned by Duro-Last Roofing, Inc. October 2005

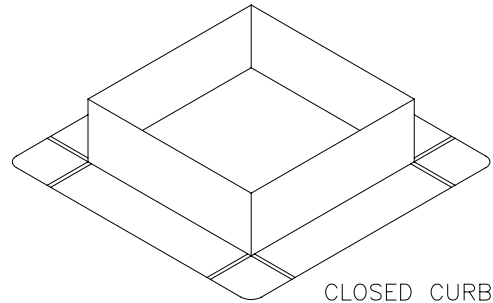

CLOSED CURB

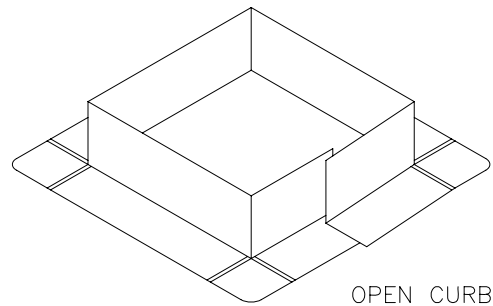

OPEN CURB

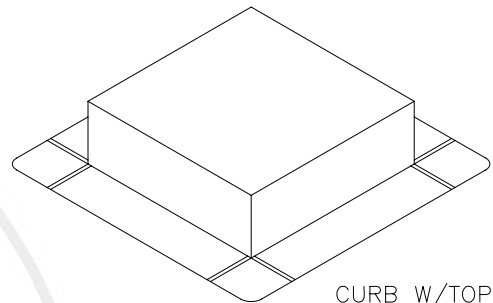

CURB W/TOP

MINIMUM CURB SIZES				
	Width	Length	Height	SKIRT
	A	B	C	
OPEN	2"	2"	8"	6"
CLOSED	2.5"	2.5"	8"	6"
W/TOP	3.5"	3.5"	3"	6"



Duro-Last Roofing, Inc.
525 Morley Drive
Saginaw, MI 48601
Ph: 1-800-248-0280
Fax: 1-800-432-9331
www.duro-last.com