

PRODUCT DATA SHEET

DURO-LAST DOME STRAINER



Description:

The Duro-Last Dome Strainer (available in blue only) is fabricated with a rigid cast aluminum dome and three weldable attachment tabs. The tabs are made from a high tenacity low shrink, weft inserted 18 x 14, 1,000/Denier polyester fabric. Duro-Last Dome Strainers may be used as replacements to existing strainers or in new construction applications.

Duro-Last Dome Strainers are entirely resistant to rust and corrosion. The design allows for free water flow and protection against clogs as well as a quick installation. Dome strainers are packaged with stainless steel fittings which are used to fasten the Duro-Last skirt to the dome strainer.

Installation:

The Duro-Last Dome Strainer shall be heat-welded (hot-air) to the field membrane. In no instance should the dome strainer be mechanically attached to the field membrane. The Duro-Last Dome Strainer is not a watertight detail by itself. However, when used in conjunction with the Duro-Last Drain Boot and compression rings per manufacturers' specifications, it becomes a watertight assembly.

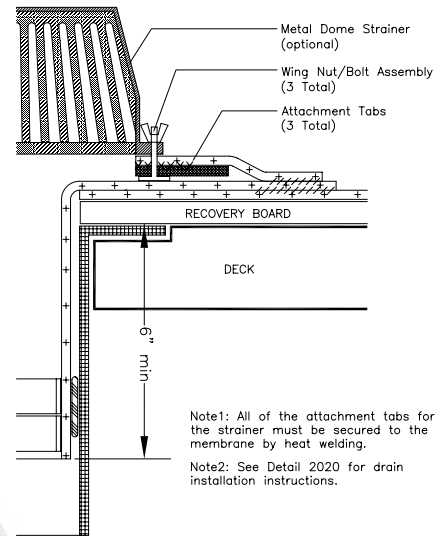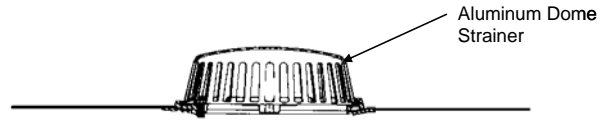

2021 NTS DRAIN BOOT W/DL DOME STRAINER
New Construction or Reroof
© COPYRIGHT 2003

For more information on these and other Duro-Last Products, contact the Duro-Last Engineering Services Department.

E-Mail: engineering@duro-last.com

"Duro-Last" and the interlocking "DL" are registered marks owned by Duro-Last Roofing, Inc. October 2005



Duro-Last Roofing, Inc.
525 Morley Drive
Saginaw, MI 48601
Ph: 1-800-248-0280
Fax: 1-800-432-9331
www.duro-last.com