


PRODUCT DATA SHEET

DURO-LAST EHD SCREWS

Description:

Duro-Last[®], Inc. requires the use of Duro-Coated Screws for the mechanical fastening of the Duro-Last Roofing System and insulation board(s). When higher pull values are needed Duro-Coated #15 (.204") diameter screws may yield a higher pull out resistance value. #15 diameter fasteners are equipped with a P-3 truss head, and have a drill point. Laboratory and field-testing have proven that Duro-Last Duro-Coated Screws meet all roofing application needs. Duro-Last Duro-Coated Screws pass two FM 4470 standards for corrosion, totaling 30 cycles in a Kesternich Cabinet, before being sold by Duro-Last, Inc. Duro-Last, Inc. also requires that all Duro-Coated Screws pass 20° and 40° bend tests (for hardness) and be able to penetrate a 20-gauge deck in under three seconds with a 50 lb. load.

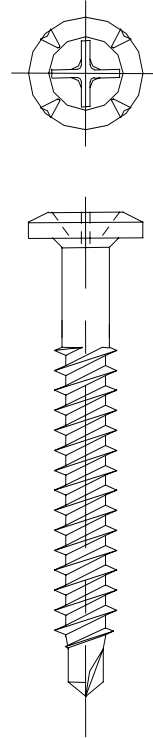

Installation:

Penetration into all deck types is 1-inch min., from the top surface of the deck.

Note:

The screws listed here are in stock. Other sizes are available on a drop-ship basis. Please allow adequate time for ordering and delivery on special orders.

Length		Threads		Quantity
US	Metric	US	Metric	
2"	51mm	Full	Full	1000
3"	76mm	2.875"	73mm	1000
4"	102mm	3.875"	98mm	1000
5"	127mm	3.875"	98mm	1000
6"	152mm	3.875"	98mm	500
7"	178mm	3.875"	98mm	500
8"	203mm	3.875"	98mm	500
9"	229mm	3.875"	98mm	500
10"	254mm	3.875"	98mm	500
11"	279mm	3.875"	98mm	500
12"	305mm	3.875"	98mm	500
14"	355mm	3.875"	98mm	500
16"	406mm	3.875"	98mm	500
18"	457mm	3.875"	98mm	500
20"	508mm	3.875"	98mm	500

For more information on these and other Duro-Last Products, contact the Duro-Last Engineering Services Department.

E-Mail: engineering@duro-last.com

"Duro-Last" and the interlocking "DL" are registered marks owned by Duro-Last Roofing, Inc. October 2005



Duro-Last Roofing, Inc.
525 Morley Drive
Saginaw, MI 48601
Ph: 1-800-248-0280
Fax: 1-800-432-9331
www.duro-last.com