

# PRODUCT DATA SHEET

## DURO-LAST GEOTEXTILE SLIPSHEET

### Description:

Geotextile slipsheet provides a lightweight and cost-effective separation when overlaying an existing roof system or an incompatible insulation product such as polystyrene. The roll sizes are available in 12.5 ft. x 360 ft rolls. The slipsheet is made from 100% polypropylene fibers that are needle-punched to form a dimensionally stable fabric. This slipsheet cannot be used as a re-cover over gravel-surfaced or ballasted roofs.

The Geotextile slipsheet may be used over:

- Smooth or granular surfaced built-up roofs
- Modified bitumen
- Coal tar pitch
- Single-ply membranes such as PVC, CSPE (Hypalon), etc.
- Smooth sprayed urethane foam
- Acrylic and aluminum coatings
- Polystyrene insulations
- Shingles


Refer to the "Getting Started" section of the Duro-Last Specification Manual for additional information on substrate separation.

### Installation:

The slipsheet must be installed on a clean and smooth surface, smooth side up. Individual pieces must be overlapped 3-inches.

The slipsheet must be attached with Duro-Last approved fasteners, and 3" metal plates. Place fasteners in each corner and along the overlap a maximum of 15 ft. o.c. Install a minimum of one fastener for curb or wall sections less than 4 ft. in length and a minimum of two fasteners for sections between 4 ft. and 15 ft. in length. When installing the slipsheet along the top of parapet walls, increased fastener spacings may be necessary.

The rolls should be stored elevated and covered to keep them dry. Use tarps, if necessary, to protect from rain. Only install as much slipsheet as can be covered by the roof membrane by the end of the day or onset of inclement weather.

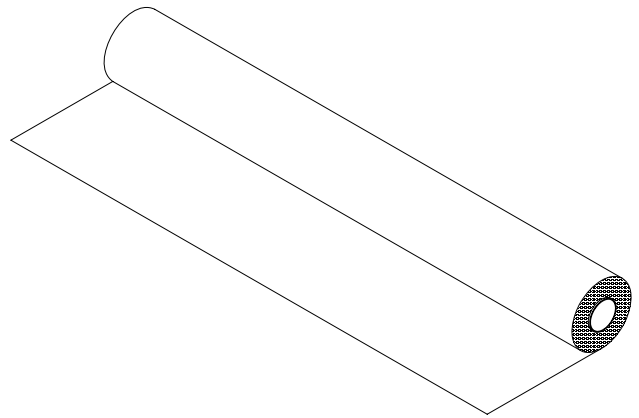

### Physical Properties

Dimensions	12.5 ft. x 360 ft.
Area	4500 sq. ft.
Weight	130 lb. (2.8 lb. / 100 sq. ft.)
Thickness	45 mils

For more information on these and other Duro-Last Products, contact the Duro-Last Engineering Services Department.

E-Mail: [engineering@duro-last.com](mailto:engineering@duro-last.com)

"Duro-Last" and the interlocking "DL" are registered marks owned by Duro-Last Roofing, Inc. October 2005



Duro-Last Roofing, Inc.  
525 Morley Drive  
Saginaw, MI 48601  
Ph: 1-800-248-0280  
Fax: 1-800-432-9331  
[www.duro-last.com](http://www.duro-last.com)