


# PRODUCT DATA SHEET

## DURO-LAST HD SCREWS

### Description:

Duro-Last<sup>®</sup>, Inc. requires the use of Duro-Coated Screws for mechanical fastening of the Duro-Last<sup>®</sup> Roofing System and insulation board(s). Duro-Coated Screws are available in a #14 diameter only, are equipped with a P-3 truss head and have either a drill or pinch point. Laboratory and field testing have proven that Duro-Last<sup>®</sup> Duro-Coated Screws can be used in all types and varieties of roofing applications. Duro-Last<sup>®</sup> Duro-Coated Screws must pass twice the FM 4470 standard for corrosion, totaling 30 cycles in a Kesternich Test, before being sold by Duro-Last<sup>®</sup>, Inc. Duro-Last<sup>®</sup>, Inc. also requires that all Duro-Coated Screws pass 20° and 40° bend tests (hardness) and be able to penetrate a 20 gauge deck in under three seconds with a 50 lb. load.

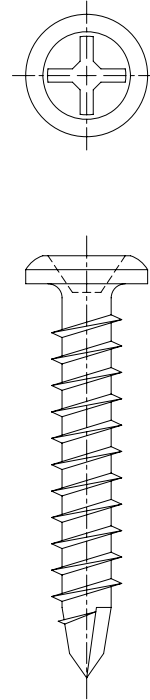

### Installation:

Penetration into all deck types is 1-inch minimum, from the top surface of the deck.

### Note:

The screws listed here are in stock. Other sizes are available on a drop ship basis. Please allow adequate time for ordering and delivery on special orders.

Length		Threads		Quantity
US	Metric	US	Metric	
1.5"	38mm	Full	Full	1000
2"	51mm	Full	Full	1000
2.5"	64mm	Full	Full	1000
3"	76mm	Full	Full	1000
3.5"	89mm	3"	76mm	1000
4"	102mm	3"	76mm	1000
4.5"	115mm	3"	76mm	1000
5"	127mm	4"	76mm	1000
5.5"	140mm	4"	102mm	1000
6"	152mm	4"	102mm	1000
7"	178mm	4"	102mm	500
8"	203mm	4"	102mm	500
9"	229mm	4"	102mm	500
10"	254mm	4"	102mm	500
11"	279mm	4"	102mm	500
12"	305mm	4"	102mm	500

For more information on these and other Duro-Last Products, contact the Duro-Last Engineering Services Department.

E-Mail: [engineering@duro-last.com](mailto:engineering@duro-last.com)

"Duro-Last" and the interlocking "DL" are registered marks owned by Duro-Last Roofing, Inc. October 2005



Duro-Last Roofing, Inc.  
525 Morley Drive  
Saginaw, MI 48601  
Ph: 1-800-248-0280  
Fax: 1-800-432-9331  
[www.duro-last.com](http://www.duro-last.com)