


PRODUCT DATA SHEET

DURO-LAST INSIDE AND OUTSIDE CORNERS

Installation:

Prefabricated inside and outside corners shall be heat-welded to the field membrane and/or parapet sections and shall be installed in every instance of a corner. The use of outside corners is required by Duro-Last® Inc., but the use of inside corners is optional depending on the installation of flashing membrane. Inside and outside corners are manufactured from the membrane and shall be furnished by Duro-Last®, Inc. (See detail 1180).

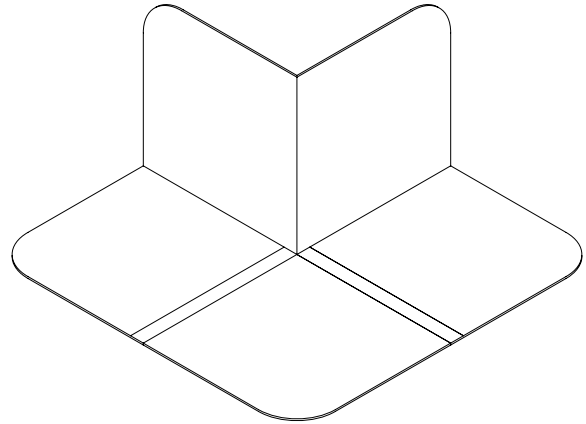


OUTSIDE CORNERS
(SEE NOTE)


Inside and Outside Corners:

Duro-Last® Patented Prefabricated Corner Flashings (available in white, gray and tan colors) are fabricated from a high tenacity, low shrink weft inserted 18 x 14, 1000 Denier polyester fabric that has been coated with a proven thermoplastic alloy.

NOTE: Outside corners must be manufactured by Duro-Last. Inside corners can either be manufactured in the field or purchased from Duro-Last Roofing, Inc.

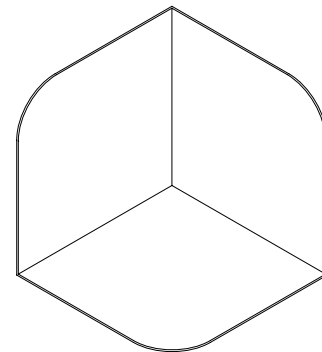

INSIDE CORNERS

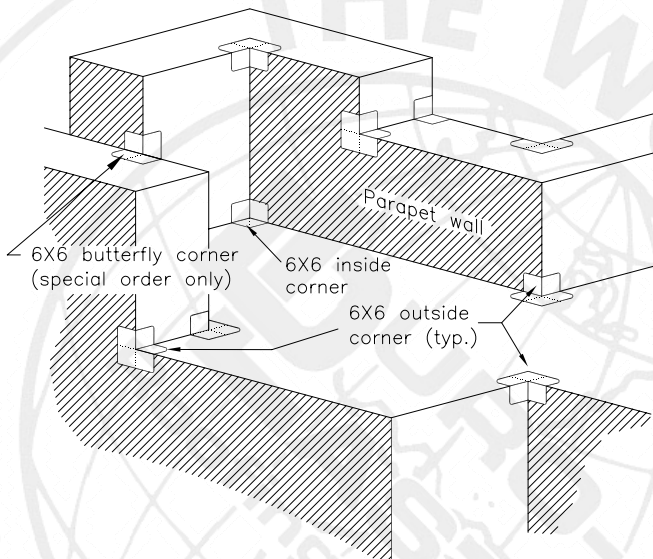

For more information on these and other Duro-Last Products, contact the Duro-Last Engineering Services Department.

E-Mail: engineering@duro-last.com

"Duro-Last" and the interlocking "DL" are registered marks owned by Duro-Last Roofing, Inc. October 2005



Duro-Last Roofing, Inc.
525 Morley Drive
Saginaw, MI 48601
Ph: 1-800-248-0280
Fax: 1-800-432-9331
www.duro-last.com