

# PRODUCT DATA SHEET


## DURO-LAST ROOF TRAK® III WALKWAY PAD

### Description:


Roof Trak® III is a non-skid, maintenance-free walkway/protection pad. Roof Trak® III is an extruded pad made from both recycled Duro-Last® Roofing membrane and an oriented strand polyester reinforcement. Duro-Last®, Inc. manufactures the Roof Trak® III Walkway Pad to provide protection in heavily traveled rooftop areas. It also provides added protection around mechanical equipment and as a separator for sleepers that support mechanical equipment. Field and laboratory testing has proven that Roof Trak® III can be used in for all seasons and applications.

A new feature of the Roof Trak® III product is the full length attachment skirt. The full length skirt increases the pad's performance in high velocity wind zones by 120%.

Duro-Last®, Inc. manufactures Roof Trak® III in white, tan and gray colors. Roof Trak® III is available in **30"** (.76 m) and **60"** (1.52 m) widths and in lengths of **60"** (1.5 m). **Additional lengths and fully-skirted options are available by special order only.**

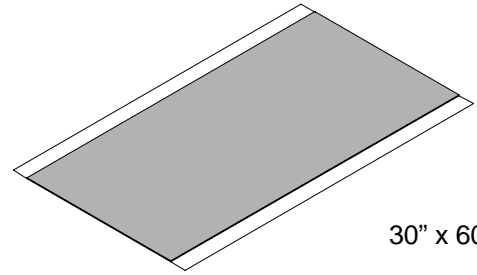

30" x 60"

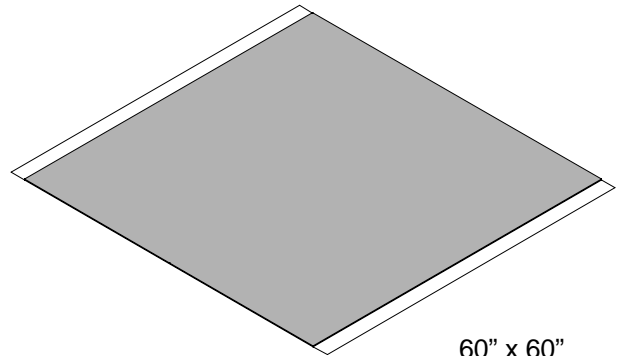

60" x 60"

### Installation:

The Duro-Last® Walkway Pad attachment skirts shall be heat-welded (hot-air) to the field membrane using a 1.5" wide weld along the entire length of the skirt.

Walkway pads installed directly over field seams shall have one side unattached to allow for the inspection of field seams for warranty purposes. Following inspection, the unattached skirt must be welded to the roof membrane. Be sure to note that a 1" (25 mm) gap is required between sections of walkway pad to allow for proper water drainage.

For more information on these and other Duro-Last Products, contact the Duro-Last Engineering Services Department.

E-Mail: [engineering@duro-last.com](mailto:engineering@duro-last.com)

PHYSICAL PROPERTIES & CHARACTERISTICS		
	U.S.	METRIC
Thickness	0.135 in.	3 mm
Weight	12.66 oz./sq.ft.	3.9 kg/m <sup>2</sup>
Breaking Strength (md)	516 lbs.	2296 N
Breaking Strength (cmd)	489 lbs.	2176 N
Elongation (md)	50%	50%
Elongation (cmd)	64%	64%
Tear Strength (md)	45 lbs.	200 N
Tear Strength (cmd)	71 lbs.	316 N



Duro-Last Roofing, Inc.  
525 Morley Drive  
Saginaw, MI 48601  
Ph: 1-800-248-0280  
Fax: 1-800-432-9331  
[www.duro-last.com](http://www.duro-last.com)