

# PRODUCT DATA SHEET

## DURO-LAST FASCIA SYSTEMS

### Description:

Duro-Last® Fascia Bar(s) (available in white only) are fabricated from a rigid exterior vinyl with slotted holes 6" (152 mm) on center. Duro-Last® Fascia Bar may be used as perimeter detail for the Duro-Last® Roofing System and as termination on any square or rectangular penetration. Duro-Last®, Inc. offers two sizes of fascia, 1 3/4" (44 mm) and 4" (102 mm) available in 10' (3 m) lengths only.

Duro-Last® Fascia Cover(s) are fabricated from a rigid exterior vinyl and are available in three colors for both 1 3/4" (44 mm) and 4" (102 mm) fascia bars. White, tan and gray covers are available in 10' (3 m) lengths with joint clips to enhance the aesthetics of the system. Kynar-coated metal covers are available upon request. See Product Data Sheet for Duro-Cap Metal Fascia Systems.

Duro-Last® 1 3/4" Fascia Bar or cover can be packaged in two sizes of tubes. The small tube contains a maximum of 100 linear feet (30.5 m) while a large tube contains 500 linear feet (152.5 m) maximum. Duro-Last® 4" Fascia Bar or cover are packaged in large tubes containing a maximum of 150 linear feet.

Duro-Last® Fascia Bars have been successfully tested by Factory Mutual Research Corporation as an approved edging component for FM 1-90 roof assemblies.



### Installation:

The 1 3/4" (44 mm) fascia bar must be fastened 6" (.15 m) on center. The 4" (102 mm) fascia system must be installed 6" (.15 m) on center maximum, along one row of holes. It is required to leave a 1/4" (6.4 mm) gap between sections of fascia bar and a 1" gap between the cover joints. The fascia bar joints and cover joints should be staggered 12 inches minimum. This gap will be covered by the fascia cover clip (See Details 3030 & 3040). The 4" (102 mm) fascia system is not to be installed as a gravel/water stop. All vertical applications require Duro-Caulk on both sides of fascia bar.

For more information on these and other Duro-Last Products, contact the Duro-Last Engineering Services Department.

E-Mail: [engineering@duro-last.com](mailto:engineering@duro-last.com)

"Duro-Last" and the interlocking "DL" are registered marks owned by Duro-Last Roofing, Inc. October 2005

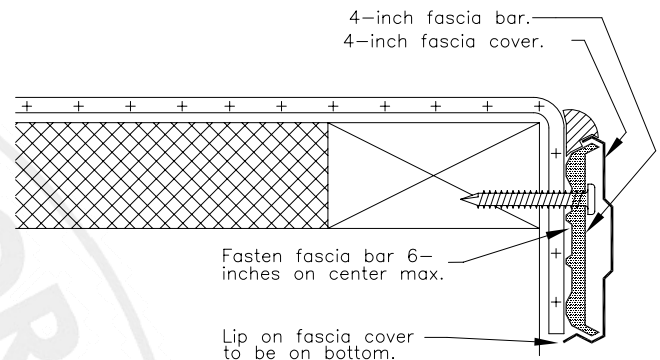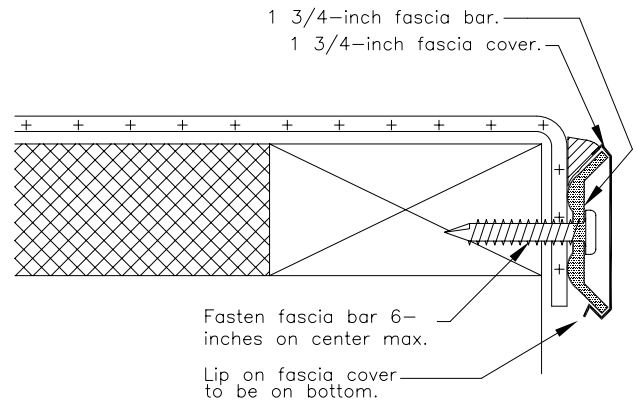

Duro-Last Roofing, Inc.  
525 Morley Drive  
Saginaw, MI 48601  
Ph: 1-800-248-0280  
Fax: 1-800-432-9331  
[www.duro-last.com](http://www.duro-last.com)