

PRODUCT DATA SHEET

DURO-LAST 3-INCH METAL PLATE


Description:

The Duro-Last® Metal Plate is 0.024-inch (.6 mm) thick, 3" x 3" (76 x 76mm) square galvalume plate. Galvalume has proven weatherability and resiliency. The Duro-Last® Metal Plates are packaged and sold in quantities of 500.

Duro-Last® Metal Plates are stamped to include a recessed ¼-inch (6.4 mm) diameter hole in the center and a series of ribs for added strength. The configuration of the ribs and the hole is used to prevent the screw head from coming in contact with the Duro-Last® Roofing Membrane. The Duro-Last® Metal Plate is a long-lasting and durable plate that is available only from Duro-Last®, Inc.

Installation:

Duro-Last® Metal Plates may be used for installation of insulation, fastening around all penetrations and between the tabs on sheet edges which are perpendicular to the tabs, and on the parapet sections. For maximum wind uplift resistance, the stress distribution plate should be installed with the edge ¼-inch, minimum, (6 mm) from the tab edge and ¼-inch, minimum, (6 mm) from the factory weld.

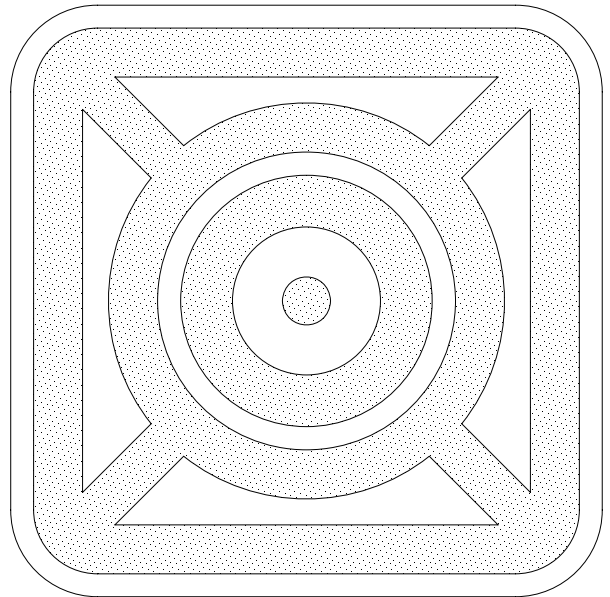

For more information on these and other Duro-Last Products, contact the Duro-Last Engineering Services Department.

E-Mail: engineering@duro-last.com

"Duro-Last" and the interlocking "DL" are registered marks owned by Duro-Last Roofing, Inc. October 2005



Duro-Last Roofing, Inc.
525 Morley Drive
Saginaw, MI 48601
Ph: 1-800-248-0280
Fax: 1-800-432-9331
www.duro-last.com