

# PRODUCT DATA SHEET

## DURO-LAST STRIP MASTIC

### Description:


Duro-Last<sup>®</sup>, Inc. supplies Strip Mastic as a high performance permanent elastic butyl tape for use with the Duro-Last<sup>®</sup> Single-Ply System. Strip Mastic is excellent in areas subjected to stress and vibrations as well as expansion and contraction. Strip Mastic is especially effective in roofing applications as a sealant against moisture penetrations around flashings.

Strip Mastic is excellent in areas requiring superior tensile strength and extensibility (webbing/elongation), in all climates, which is most important with today's high tech single-ply materials. Strip Mastic is formulated for adhesions to all types of building materials. Its superior tack affords tenacious adhesion to aluminized steel, galvanized metal, masonry, and wood to ensure a weather tight seal.

Strip Mastic is odorless, easy to use, and high impact resistant. Duro-Last<sup>®</sup>, Inc. has Strip Mastic available, with a paper backing, on 3/4" x 35' linear feet (19mm x 15m) rolls, and packaged in cases of 10 rolls each.

### Installation:

Strip Mastic must be installed according to current Duro-Last specifications. To install, apply constant, even pressure on the Strip Mastic. Strip Mastic may be used in all applications in which ultraviolet radiation exposure is not probable or possible. A typical example is the use of strip mastic between the membrane and wall before the installation of termination bar (see detail 6020).

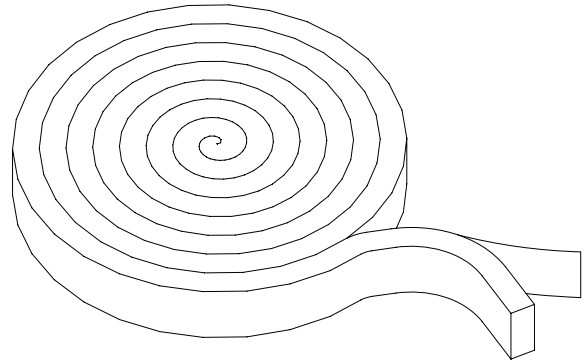

### Technical Data

Temperature Range	-60° F – 212° F (-51° C – 100° C)
Specific Gravity	1.38
Solubility in Water	Insoluble
Solubility in Solvents	Soluble in most solvents
Flexibility	No cracking @ -60° F (-51° C)
Odor	Odorless
Chemical Resistance	Excellent

For more information on these and other Duro-Last Products, contact the Duro-Last Engineering Services Department.

E-Mail: [engineering@duro-last.com](mailto:engineering@duro-last.com)

"Duro-Last" and the interlocking "DL" are registered marks owned by Duro-Last Roofing, Inc. October 2005



Duro-Last Roofing, Inc.  
525 Morley Drive  
Saginaw, MI 48601  
Ph: 1-800-248-0280  
Fax: 1-800-432-9331  
[www.duro-last.com](http://www.duro-last.com)